


**600/1000 V PVC INSULATED, ALUMINIUM TAPE ARMoured AND PVC SHEATHED CABLES**

**PVC/DATA/PVC (acc. to IEC 60502-1)**

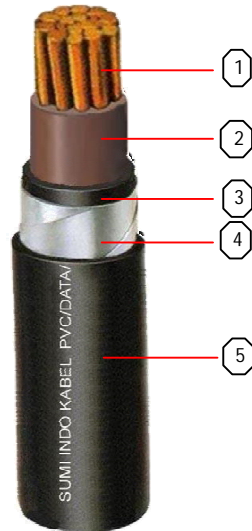


Constructions :

- ① Conductor (Annealed Copper)
- ② Insulation (PVC Compound)
- ③ Inner Covering (PVC Compound)
- ④ Double Aluminium Tape armour
- ⑤ Outer sheath (PVC Compound)

**600/1000 V PVC INSULATED, STEEL TAPE ARMoured AND PVC SHEATHED CABLES**

**PVC/DSTA/PVC (acc. to IEC 60502-1)**

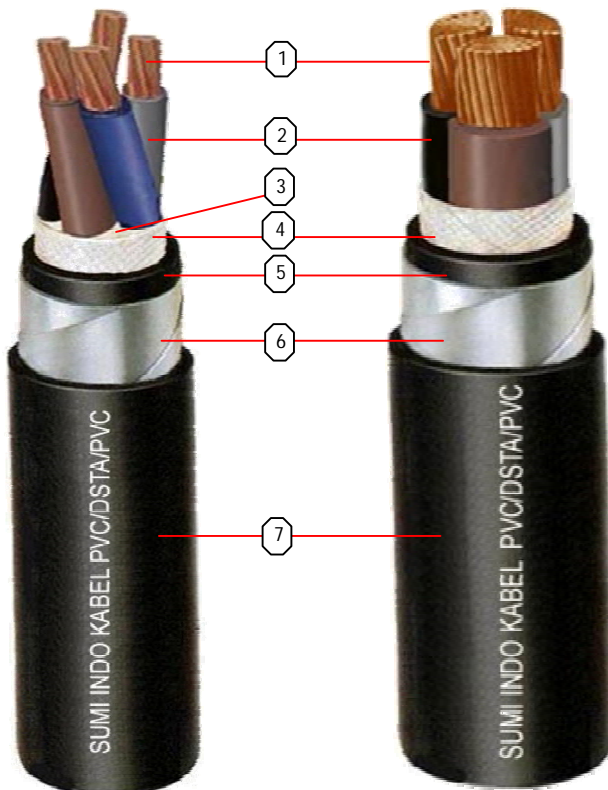

Constructions :

- ① Conductor (Annealed Copper)
- ② Insulation (PVC Compound)
- ③ Filler (Polypropylene yarn, or extruded filler up to request)
- ④ Binding tape (Manufacturer's option)
- ⑤ Inner Covering (PVC Compound)
- ⑥ Double Galvanized Steel Tape armour
- ⑦ Outer sheath (PVC Compound)

**Note : Special application upon request**

- \* Available product in accordance to : SPLN, ICEA/NEMA, AS standard or other requirement.
- \* Flame retardant test acc to IEC 60332-3 Cat. A, B or C.
- \* Anti termite performance.
- \* Tin coated Copper conductor.
- \* Polyethylene / Low smoke Halogen Free sheathed

**600/1000 V PVC INSULATED, ALUMINIUM TAPE ARMoured AND PVC SHEATHED CABLES  
PVC/DATA/PVC (IEC 60502-1)**

CONSTRUCTION		TECHNICAL DATA
<b>Conductor</b>	: Plain Annealed Copper (to IEC 60228 class 2)	<b>Voltage</b> U <sub>o</sub> /U - 600/1000 V
<b>Insulation</b>	: PVC Compound type A	<b>Operating Temperature</b> Maximum 70°C
<b>Inner covering</b>	: PVC Compound	
<b>Armour</b>	: Double Aluminium tape	
<b>Sheath</b>	: PVC Compound type ST1	
<b>Colour Ident.</b>	: Insulation - Brown Sheath - Black	

**SINGLE CORE**

Conductor				Nominal Thickness of Insulation	Thickness of Inner covering (approx.)	Nominal thickness of Aluminium tape	Nominal Thickness of Sheath	Overall diameter of cable (approx.)	Weight of cable (approx.)	Maximum Conductor Resistance at 20°C
Nominal Cross-section area	Shape of Cond.	number of wire	Diameter of Conductor (approx.)							
mm <sup>2</sup>		number	mm	mm	mm	mm	mm	mm	kg/km	Ω/km
50	RM	19	9.2	1.4	1.0	0.5	1.8	19.5	820	0.387
70	RM	19	10.9	1.4	1.0	0.5	1.8	21.0	1045	0.268
95	RM	19	12.6	1.6	1.0	0.5	1.8	23.5	1345	0.193
120	RM	37	14.2	1.6	1.0	0.5	1.8	25.0	1610	0.153
150	RM	37	15.9	1.8	1.0	0.5	1.8	27.0	1950	0.124
185	RM	37	17.6	2.0	1.0	0.5	1.8	29.5	2340	0.0991
240	RM	61	20.3	2.2	1.0	0.5	1.9	32.5	2990	0.0754
300	RM	61	22.7	2.4	1.0	0.5	1.9	35.0	3630	0.0601
400	RM	61	25.7	2.6	1.2	0.5	2.1	39.5	4640	0.0470
500	RM	61	28.8	2.8	1.2	0.5	2.2	43.5	5695	0.0366

Note RM : Circular Stranded Class 2

**600/1000 V PVC INSULATED, STEEL TAPE ARMURED AND PVC SHEATHED CABLES  
PVC/DSTA/PVC (IEC 60502-1)**

CONSTRUCTION				TECHNICAL DATA			
<b>Conductor</b>	:	Plain Annealed Copper (to IEC 60228 class 1 or 2)		<b>Voltage</b>	U <sub>0</sub> /U - 600/1000 V		
<b>Insulation</b>	:	PVC Compound type A		<b>Operating Temperature</b>	Maximum 70°C		
<b>Filler</b>	:	Suitable material					
<b>Inner covering</b>	:	PVC Compound					
<b>Armour</b>	:	Double Galvanized Steel tape					
<b>Sheath</b>	:	PVC Compound type ST1					
<b>Colour Ident.</b>	:	Insulation - Brown, Blue Sheath - Black					

**TWO CORES**

Conductor				Nominal Thickness of Insulation	Thickness of Inner covering (approx.)	Nominal Thickness of Galv. Steel tape	Nominal Thickness of Sheath	Overall diameter of cable (approx.)	Weight of cable (approx.)	Maximum Conductor Resistance at 20°C
Nominal Cross- section area	Shape of Cond.	number of wire	Diameter of Conductor (approx.)							
mm <sup>2</sup>		number	mm	mm	mm	mm	mm	mm	kg/km	Ω/km
1.5	RE	1	1.38	0.8	1.0	0.2	1.8	13.0	240	12.1
1.5	RM	7	1.6	0.8	1.0	0.2	1.8	13.0	250	12.1
2.5	RE	1	1.78	0.8	1.0	0.2	1.8	13.5	280	7.41
2.5	RM	7	2.0	0.8	1.0	0.2	1.8	14.0	290	7.41
4	RE	1	2.26	1.0	1.0	0.2	1.8	15.5	360	4.61
4	RM	7	2.6	1.0	1.0	0.2	1.8	16.0	375	4.61
6	RM	7	3.1	1.0	1.0	0.2	1.8	17.0	440	3.08
10	RM	7	4.1	1.0	1.0	0.2	1.8	19.0	575	1.83
16	RM	7	5.1	1.0	1.0	0.2	1.8	21.0	745	1.15
25	RM	7	6.4	1.2	1.0	0.2	1.8	24.5	1030	0.727
35	RM	7	7.6	1.2	1.0	0.2	1.8	27.0	1290	0.524
50	RM	19	9.2	1.4	1.0	0.2	1.8	31.0	1715	0.387
70	RM	19	10.9	1.4	1.0	0.2	1.9	34.0	2265	0.268
95	RM	19	12.6	1.6	1.2	0.2	2.1	39.0	2900	0.193
120	RM	37	14.2	1.6	1.2	0.5	2.2	43.5	3925	0.153
150	RM	37	15.9	1.8	1.2	0.5	2.3	48.0	4725	0.124
185	RM	37	17.6	2.0	1.4	0.5	2.4	52.5	5675	0.0991
240	RM	61	20.3	2.2	1.4	0.5	2.6	58.5	7170	0.0754
300	RM	61	22.7	2.4	1.6	0.5	2.8	64.5	8710	0.0601

Note RE : Round Solid Class 1

RM : Circular Stranded Class 2

**600/1000 V PVC INSULATED, STEEL TAPE ARMURED AND PVC SHEATHED CABLES  
PVC/DSTA/PVC (IEC 60502-1)**

**CONSTRUCTION**

**Conductor** : Plain Annealed Copper  
(to IEC 60228 class 1 or 2)

**Insulation** : PVC Compound type A

**Filler** : Suitable material

**Inner covering** : PVC Compound

**Armour** : Double Galvanized Steel tape

**Sheath** : PVC Compound type ST1

**Colour Ident.** : Insulation - Brown, Black, Grey  
Sheath - Black

**TECHNICAL DATA**

**Voltage**  
U<sub>0</sub>/U - 600/1000 V

**Operating Temperature**  
Maximum 70°C

**THREE CORES**

Conductor				Nominal Thickness of Insulation	Thickness of Inner covering (approx.)	Nominal Thickness of Galv. Steel tape	Nominal Thickness of Sheath	Overall diameter of cable (approx.)	Weight of cable (approx.)	Maximum Conductor Resistance at 20°C
Nominal Cross- section area	Shape of Cond.	number of wire	Diameter of Conductor (approx.)							
mm <sup>2</sup>		number	mm	mm	mm	mm	mm	mm	kg/km	Ω/km
1.5	RE	1	1.38	0.8	1.0	0.2	1.8	13.5	270	12.1
1.5	RM	7	1.6	0.8	1.0	0.2	1.8	13.5	285	12.1
2.5	RE	1	1.78	0.8	1.0	0.2	1.8	14.0	320	7.41
2.5	RM	7	2.0	0.8	1.0	0.2	1.8	14.5	335	7.41
4	RE	1	2.26	1.0	1.0	0.2	1.8	16.0	420	4.61
4	RM	7	2.6	1.0	1.0	0.2	1.8	16.5	445	4.61
6	RM	7	3.1	1.0	1.0	0.2	1.8	18.0	530	3.08
10	RM	7	4.1	1.0	1.0	0.2	1.8	20.0	710	1.83
16	RM	7	5.1	1.0	1.0	0.2	1.8	22.0	935	1.15
25	RM	7	6.4	1.2	1.0	0.2	1.8	26.0	1330	0.727
35	RM	7	7.6	1.2	1.0	0.2	1.8	28.5	1685	0.524
50	SM	19	6.8	1.4	1.0	0.2	1.9	27.0	2005	0.387
70	SM	19	8.2	1.4	1.2	0.2	2.0	30.5	2725	0.268
95	SM	19	9.7	1.6	1.2	0.5	2.2	36.5	4065	0.193
120	SM	37	10.9	1.6	1.2	0.5	2.3	39.5	4765	0.153
150	SM	37	11.9	1.8	1.4	0.5	2.4	42.5	5745	0.124
185	SM	37	13.6	2.0	1.4	0.5	2.6	47.5	7055	0.0991
240	SM	37	15.8	2.2	1.6	0.5	2.8	53.5	9255	0.0754
300	SM	37	17.5	2.4	1.6	0.5	2.9	58.0	11300	0.0601

Note : RE : Round Solid Class 1

RM : Circular Stranded Class 2

SM : Three Segmental Stranded Compacted Class 2

**600/1000 V PVC INSULATED, STEEL TAPE ARMURED AND PVC SHEATHED CABLES  
PVC / DSTA / PVC (IEC 60502-1)**

CONSTRUCTION		TECHNICAL DATA	
<b>Conductor</b>	: Plain Annealed Copper (to IEC 60228 class 1 or 2)	<b>Voltage</b>	U <sub>0</sub> /U - 600/1000 V
<b>Insulation</b>	: PVC Compound type A	<b>Operating Temperature</b>	Maximum 70°C
<b>Filler</b>	: Suitable material		
<b>Inner covering</b>	: PVC Compound		
<b>Armour</b>	: Double Galvanized Steel tape		
<b>Sheath</b>	: PVC Compound type ST1		
<b>Colour Ident.</b>	: Insulation - Brown, Black, Grey, Blue Sheath - Black		

**FOUR CORES**

Conductor				Nominal Thickness of Insulation	Thickness of Inner covering (approx.)	Nominal Thickness of Galv. Steel tape	Nominal Thickness of Sheath	Overall diameter of cable (approx.)	Weight of cable (approx.)	Maximum Conductor Resistance at 20°C
Nominal Cross- section area	Shape of Cond.	number of wire	Diameter of Conductor (approx.)							
mm <sup>2</sup>		number	mm	mm	mm	mm	mm	mm	kg/km	Ω/km
1.5	RE	1	1.38	0.8	1.0	0.2	1.8	14.0	310	12.1
1.5	RM	7	1.6	0.8	1.0	0.2	1.8	14.5	325	12.1
2.5	RE	1	1.78	0.8	1.0	0.2	1.8	15.0	375	7.41
2.5	RM	7	2.0	0.8	1.0	0.2	1.8	15.5	390	7.41
4	RE	1	2.26	1.0	1.0	0.2	1.8	17.5	500	4.61
4	RM	7	2.6	1.0	1.0	0.2	1.8	18.0	525	4.61
6	RM	7	3.1	1.0	1.0	0.2	1.8	19.0	640	3.08
10	RM	7	4.1	1.0	1.0	0.2	1.8	21.5	860	1.83
16	RM	7	5.1	1.0	1.0	0.2	1.8	24.0	1160	1.15
25	RM	7	6.4	1.2	1.0	0.2	1.8	28.0	1650	0.727
35	RM	7	7.6	1.2	1.0	0.2	1.8	31.0	2120	0.524
50	SM	19	8.1	1.4	1.2	0.2	2.0	31.0	2595	0.387
70	SM	19	9.7	1.4	1.2	0.5	2.1	36.0	3865	0.268
95	SM	19	11.4	1.6	1.2	0.5	2.3	41.0	5175	0.193
120	SM	37	12.9	1.6	1.4	0.5	2.4	44.5	6125	0.153
150	SM	37	14.2	1.8	1.4	0.5	2.6	49.0	7405	0.124
185	SM	37	16.0	2.0	1.6	0.5	2.7	54.0	9115	0.0991
240	SM	37	18.2	2.2	1.6	0.5	3.0	60.0	11900	0.0754
300	SM	37	20.6	2.4	1.6	0.5	3.2	66.5	14625	0.0601

Note : RE : Round Solid Class 1

RM : Circular Stranded Class 2

SM : Three Segmental Stranded Compacted Class 2

**600/1000 V PVC INSULATED, STEEL TAPE ARMoured AND PVC SHEATHED CABLES  
PVC/DSTA/PVC (IEC 60502-1)**

**CONSTRUCTION**

**Conductor** : Plain Annealed Copper  
(to IEC 60228 class 1 or 2)

**Insulation** : PVC Compound type A

**Filler** : Suitable material

**Inner covering** : PVC Compound

**Armour** : Double Galvanized Steel tape

**Sheath** : PVC Compound type ST1

**Colour Ident.** : Insulation - Brown, Black, Grey, Blue, Green / Yellow Stripe  
Sheath - Black

**TECHNICAL DATA**

**Voltage**  
U<sub>0</sub>/U - 600/1000 V

**Operating Temperature**  
Maximum 70°C

**FIVE CORES**

Conductor				Nominal Thickness of Insulation	Thickness of Inner covering (approx.)	Nominal Thickness of Galv. Steel tape	Nominal Thickness of Sheath	Overall diameter of cable (approx.)	Weight of cable (approx.)	Maximum Conductor Resistance at 20°C
Nominal Cross-section area	Shape of Cond.	number of wire	Diameter of Conductor (approx.)							
mm <sup>2</sup>		number	mm	mm	mm	mm	mm	mm	kg/km	Ω/km
1.5	RE	1	1.38	0.8	1.0	0.2	1.8	15.0	350	12.1
1.5	RM	7	1.6	0.8	1.0	0.2	1.8	15.5	370	12.1
2.5	RE	1	1.78	0.8	1.0	0.2	1.8	16.0	425	7.41
2.5	RM	7	2.0	0.8	1.0	0.2	1.8	16.5	450	7.41
4	RE	1	2.26	1.0	1.0	0.2	1.8	18.5	580	4.61
4	RM	7	2.6	1.0	1.0	0.2	1.8	19.5	610	4.61
6	RM	7	3.1	1.0	1.0	0.2	1.8	20.5	750	3.08
10	RM	7	4.1	1.0	1.0	0.2	1.8	23.5	1025	1.83
16	RM	7	5.1	1.0	1.0	0.2	1.8	26.0	1390	1.15
25	RM	7	6.4	1.2	1.0	0.2	1.8	30.5	1995	0.727
35	RM	7	7.6	1.2	1.0	0.2	1.9	34.0	2580	0.524
50	RM	19	9.2	1.4	1.2	0.2	2.1	40.0	3400	0.387

Note : RE : Round Solid Class 1

RM : Circular Stranded Class 2